

# Armed Services Technical Information Agency

Because of our limited supply, you are requested to return this copy WHEN IT HAS SERVED YOUR PURPOSE so that it may be made available to other requesters. Your cooperation will be appreciated.

# AD

# 29637

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by  
DOCUMENT SERVICE CENTER  
KNOTT BUILDING, DAYTON, 2, OHIO

# UNCLASSIFIED

**CIVIL ENGINEERING STUDIES**

**STRUCTURAL RESEARCH SERIES NO. 66**



AD NO. 29637

ASTIA FILE COPY

**A SIMPLE APPROXIMATION FOR THE FUNDAMENTAL  
FREQUENCIES OF TWO-SPAN AND THREE-SPAN  
CONTINUOUS BEAMS**

By  
**A. S. VELETSOS**  
and  
**N. M. NEWMARK**

Technical Report  
to  
**OFFICE OF NAVAL RESEARCH**  
Contract N6ori-071(06), Task Order VI  
Project NR-064-183

**UNIVERSITY OF ILLINOIS**  
**URBANA, ILLINOIS**

# DISTRIBUTION LIST - PROJECT NR 064-183 - Task VI

a.

## Administrative Reference and Liaison Activities

Chief of Naval Research Department of the Navy Washington 25, D.C. ATTN: Code 438 (4) : Code 432 (1) : Code 423 (1)	Commanding Officer Office of Naval Research Branch Office 801 Donahue Street San Francisco 24, California (1)
--	---

Director Naval Research Laboratory Washington 25, D.C. ATTN: Tech. Info. Officer (6) : Technical Library (1) : Mechanics Division (2)	Commanding Officer Office of Naval Research Branch Office 1030 Green Street Pasadena, California (1)
--	--

Commanding Officer Office of Naval Research Branch Office 495 Summer Street Boston 10, Massachusetts (1)	Officer in Charge Office of Naval Research Branch Office, London Navy No. 100 FPO, New York, New York (1)
--	---

Commanding Officer Office of Naval Research Branch Office 346 Broadway New York 13, New York (1)	Chief, Exchange and Gift Div. Library of Congress Washington 25, D.C. (2)
--	---

Office of Naval Research The John Crerar Library Bldg. 10th Floor, 86. E. Randolph St. Chicago 1, Illinois (2)	Commander U.S. Naval Ordnance Test Station Pasadena Annex 3202 E. Foothill Blvd. Pasadena 8, California ATTN: Code P8087 (1)
---	---

Commander  
U.S. Naval Ordnance Test Station  
Inyokern, China Lake, California  
ATTN: Code 501 (1)

Commander  
U. S. Naval Proving Grounds  
Dahlgren, Virginia (1)

Armed Services Technical  
Information Agency  
Documents Service Center  
Knott Building  
Dayton 2, Ohio (5)

## Department of Defense Other Interested Government Activities GENERAL

Research and Development Board  
Department of Defense  
Pentagon Building  
Washington 25, D.C.  
ATTN: Library (Code 3D-1075) (1)

Armed Forces Special Weapons Project  
P.O. Box 2610  
Washington, D.C.  
ATTN: Col. G. F. Blunda (1)  
: Lt. Col. Bruce Jones (2)

ARMY

Chief of Staff  
Department of the Army  
Research and Development Div.  
Washington 25, D.C.  
ATTN: Chief of Research and  
Development (1)

Office of the Chief of Engineers  
Assistant Chief for Public Works  
Department of the Army  
Bldg. T-7, Gravelly Point  
Washington 25, D.C.  
ATTN: Structural Branch  
(R. L. Bloor) (1)

Engineering Research and  
Development Laboratory  
Fort Belvoir, Virginia  
ATTN: Structures Branch (1)

The Commanding General  
Sandia Base, P.O. Box 5100  
Albuquerque, New Mexico  
ATTN: Col. Canterbury (1)

Corps of Engineers, U.S. Army  
Ohio River Division Labs  
5851 Mariemont Avenue, Mariemont  
Cincinnati 27, Ohio  
ATTN: F. M. Mellinger (2)

Operations Research Officer  
The John's Hopkins University  
6410 Connecticut Avenue  
Chevy Chase, Maryland (1)

Office of Chief of Ordnance  
Research and Development Service  
Department of the Army  
The Pentagon  
Washington 25, D.C.  
ATTN: ORDTB (2)

Ballistic Research Laboratory  
Aberdeen Proving Ground  
Aberdeen, Maryland  
ATTN: Dr. C. W. Lampson (1)

Commanding Officer  
Watertown Arsenal  
Watertown, Massachusetts  
ATTN: Laboratory Division (1)

Commanding Officer  
Frankford Arsenal  
Philadelphia, Pennsylvania  
ATTN: Laboratory Division (1)

Commanding Officer  
Squier Signal Laboratory  
Fort Monmouth, New Jersey  
ATTN: Components and  
Materials Branch (1)

Other Interested Government  
ActivitiesNAVY

Chief of Bureau of Ships  
Navy Department  
Washington 25, D.C.  
ATTN: Director of Research (2)  
: Code 449 (1)  
: Code 430 (1)  
: Code 421 (1)  
: Code 423 (1)

Director  
David Taylor Model Basin  
Washington 7, D.C.  
ATTN: Structural Mechanics  
Division (2)

Director  
Naval Engineering Experiment  
Station  
Annapolis, Maryland (1)

Director  
Materials Laboratory  
New York Naval Shipyard  
Brooklyn 1, New York (1)

Chief of Bureau of Ordnance  
Navy Department  
Washington 25, D.C.  
ATTN: Ad-3, Technical Lib. (1)  
: Rec., T. N. Girauard (1)

Superintendent  
Naval Gun Factory  
Washington 25, D.C. (1)

Naval Ordnance Laboratory  
White Oak, Maryland  
RFD 1, Silver Spring, Maryland  
ATTN: Mechanics Division (2)

Naval Ordnance Test Station  
Inyokern, China Lake, California  
ATTN: Scientific Officer (1)

Chief of Bureau of Aeronautics  
Navy Department  
Washington 25, D.C.  
ATTN: TD-41, Tech. Lib. (1)  
: DE-22, C. W. Hurley (1)  
: DE-23, E. M. Ryan (1)

Superintendent  
Post Graduate School  
U.S. Naval Academy  
Monterey, California (1)

Naval Air Experimental Station  
Naval Air Materiel Center  
Naval Base  
Philadelphia 12, Pennsylvania  
ATTN: Head, Aeronautical  
Materials Laboratory (1)

Chief of Bureau of Yards and Docks  
Navy Department  
Washington 25, D.C.  
ATTN: Code P-314 (1)  
: Code C-313 (1)

Officer in Charge  
Naval Civil Engineering Research  
and Evaluation Laboratory  
Naval Station  
Port Hueneme, California (1)

Commander  
U.S. Naval Ordnance Test Station  
Inyokern, China Lake, California (1)

#### AIR FORCES

Commanding General  
U.S. Air Forces  
The Pentagon  
Washington 25, D.C.  
ATTN: Research and Development  
Division (1)

Commanding General  
Air Materiel Command  
Wright-Patterson Air Force Base  
Dayton, Ohio  
ATTN: MCAIDS (2)

Office of Air Research  
Wright-Patterson Air Force Base  
Dayton, Ohio  
ATTN: Chief, Applied Mechanics  
Group (1)

Director of Intelligence  
Headquarters, U.S. Air Force  
Washington 25, D.C.  
ATTN: Air Targets Division  
Physical Vulnerability Div.  
AFOIN-3B (2)

#### OTHER GOVERNMENT AGENCIES

U. S. Atomic Energy Commission  
Division of Research  
Washington, D.C. (1)

Argonne National Laboratory  
Bailey and Bluff  
Lamont, Illinois (1)

Director,  
National Bureau of Standards  
Washington, D.C.  
ATTN: Dr. W. H. Ramberg (2)

U. S. Coast Guard  
1300 E Street, N.W.  
Washington, D.C.  
ATTN: Chief, Testing and  
Development Division (1)

Forest Products Laboratory  
Madison, Wisconsin  
ATTN: L. J. Markwardt (1)

National Advisory Committee  
for Aeronautics  
1724 F Street, N.W.  
Washington, D.C. (1)

National Advisory Committee  
for Aeronautics  
Langley Field, Virginia  
ATTN: Mr. J. E. Duberg (1)  
Mr. J. C. Houbolt (1)

National Advisory Committee  
for Aeronautics  
Cleveland Municipal Airport  
Cleveland, Ohio  
ATTN: J. H. Collins, Jr. (1)

U.S. Maritime Commission  
Technical Bureau  
Washington, D.C.  
ATTN: Mr. V. Russo (1)

Contractors and Other Investigators  
Actively Engaged in Related Research

Professor Lynn Beedle  
Fritz Engineering Laboratory  
Lehigh University  
Bethlehem, Pennsylvania (1)

Professor R. L. Bisplinghoff  
Massachusetts Institute of Technology  
Cambridge 39, Massachusetts (1)

Dr. Walter Bleakney  
Department of Physics  
Princeton University  
Princeton, New Jersey (1)

Dean H. L. Bowman  
College of Engineering  
Drexel Institute of Technology  
Philadelphia, Pennsylvania (1)

Dr. Francis H. Clauser  
Chairman, Dept. of Aeronautics  
The Johns Hopkins University  
School of Engineering  
Baltimore 18, Maryland (1)

Professor T. J. Dolan  
Dept. of Theoretical and  
Applied Mechanics  
University of Illinois  
Urbana, Illinois (2)

Professor Lloyd Donnell  
Department of Mechanics  
Illinois Institute of Technology  
Technology Center  
Chicago 16, Illinois (1)

Professor W. J. Duncan, Head  
Dept. of Aeronautics  
James Watt Engineering Labs  
The University  
Glasgow W. 2  
England (1)

Dean W. L. Everitt  
College of Engineering  
University of Illinois  
Urbana, Illinois (1)

Dr. S. J. Fraenkel  
Armour Research Foundation  
3422 S. Dearborn  
Chicago 16, Illinois (1)

Dr. L. Fox  
Mathematics Division  
National Physical Laboratory  
Teddington, Middlesex  
England (1)

Professor B. Fried  
Washington State College  
Pullman, Washington (1)

Professor A. E. Green  
Kings College  
Newcastle on Tyne, 1, England (1)

Dr. R. J. Hansen  
Massachusetts Institute of  
Technology  
Cambridge 39, Massachusetts (1)

Dr. J. N. Goodier  
School of Engineering  
Stanford University  
Stanford, California (1)

Professor R. M. Hermes  
University of Santa Clara  
Santa Clara, California (1)

Dr. N. J. Hoff, Head  
Department of Aeronautical  
Engineering and Applied Mechanics  
Polytechnic Institute of Brooklyn  
99 Livingston Street  
Brooklyn 2, New York (1)

Dr. W. H. Hoppmann  
Dept. of Applied Mathematics  
Johns Hopkins University  
Baltimore, Maryland (1)

Professor W. C. Huntington, Head  
Department of Civil Engineering  
University of Illinois  
Urbana, Illinois (1)

Professor L. S. Jacobsen  
Stanford University  
Stanford, California (1)

Dr. Bruce Johnston  
301 W. Engineering Building  
University of Michigan  
Ann Arbor, Michigan (1)

Professor W. K. Krefeld  
College of Engineering  
Columbia University  
New York, New York (1)

Professor B. J. Lazan  
Department of Mechanics  
University of Minnesota  
Minneapolis 14, Minnesota (1)

Professor George Lee  
Department of Mechanics  
Rensselaer Polytechnical Inst.  
Troy, New York (1)

Library Engineering Foundation  
29 West 39th Street  
New York, New York (1)

Dr. W. A. McNair  
Vice President, Research  
Sandia Corporation  
Sandia Base  
Albuquerque, New Mexico (1)

Dr. M. L. Merritt  
Sandia Corporation  
Sandia Base  
Albuquerque, New Mexico (1)

Professor N. M. Newmark  
Department of Civil Engineering  
University of Illinois  
Urbana, Illinois (2)

Professor Jesse Ormondroyd  
University of Michigan  
Ann Arbor, Michigan (1)

Dr. W. R. Osgood  
Illinois Institute of Technology  
Technology Center  
Chicago 16, Illinois (1)

Dr. A. Phillips  
School of Engineering  
Stanford University  
Stanford, California (1)

Dr. W. Prager, Chairman  
Physical Sciences Council  
Brown University  
Providence, Rhode Island (1)

Professor E. Reissner  
Department of Mathematics  
Massachusetts Institute of Technology  
Cambridge 39, Massachusetts (1)

Dr. C. B. Smith  
Department of Mathematics  
Walker Hall  
University of Florida  
Gainesville, Florida (1)

Professor R. V. Southwell  
The Old House, Trumpington  
Cambridge, England (1)

Professor E. Sternberg  
Illinois Institute of Technology  
Technology Center  
Chicago 16, Illinois (1)

Professor F. K. Teichmann  
Dept. of Aeronautical Engineering  
New York University  
University Heights, Bronx  
New York, New York (1)

Dean Oswald Tippo  
Graduate College  
University of Illinois  
Urbana, Illinois (1)

Dr. G. E. Uhlenbeck  
Engineering Research Institute  
University of Michigan  
Ann Arbor, Michigan (1)

Professor C. T. Wang  
Dept. of Aeronautical Engineering  
New York University  
University Heights, Bronx  
New York, New York (1)

Dr. M. P. White  
Department of Civil Engineering  
University of Massachusetts  
Amherst, Massachusetts (1)

Dr. S. Raynor  
Mechanics Research Dept.  
American Machine and Foundry Co.  
188 W. Randolph Street  
Chicago 1, Illinois (1)

# TASK VI PROJECT - C.E. RESEARCH STAFF

Dr. W. J. Austin

Dr. T. P. Tung

Dr. A. S. Veletsos

Professor W. H. Munse

Research Assistants (5)

Files (5)

Reserve (20)

Dr. James L. Lubken  
Research Engineer  
Midwest Research Institute  
4049 Pennsylvania Avenue  
Kansas City 2, Missouri. (1)

Chief of Engineers  
Engineering Division,  
Military Construction  
Washington 25, D C.  
ATTN: ENGEB (2)

Dr. Martin Goland  
Midwest Research Institute  
4049 Pennsylvania  
Kansas City 2, Missouri (1)

Prof. L. E. Goodman  
Dept. of Mechanics and Materials  
University of Minnesota  
Minneapolis, Minnesota (1)



A SIMPLE APPROXIMATION FOR THE FUNDAMENTAL FREQUENCIES OF  
TWO-SPAN AND THREE-SPAN CONTINUOUS BEAMS

by

A. S. Veletsos and N. M. Newmark

A Technical Report of a Research Program

Sponsored by

THE OFFICE OF NAVAL RESEARCH  
DEPARTMENT OF THE NAVY

In Cooperation With

THE DEPARTMENT OF CIVIL ENGINEERING  
UNIVERSITY OF ILLINOIS

Contract N6ori-071(06), Task Order VI  
Project NR-064-183

Urbana, Illinois  
February 1954

A SIMPLE APPROXIMATION FOR THE FUNDAMENTAL FREQUENCIES OF  
TWO-SPAN AND THREE-SPAN CONTINUOUS BEAMS

by

A. S. Veletsos and N. M. Newmark

SYNOPSIS

A rapid approximate method is presented for calculating the fundamental frequencies of flexural vibration of two-span beams and of particular arrangements of three-span beams which are continuous over non-deflecting supports and are elastically restrained against rotation at their end supports. The end restraints may be provided by actual coil springs or they may represent the effect of adjoining members, but in all cases the stiffnesses of these restraints are assumed to be positive. The mass per unit of length and the flexural rigidity of the beams may vary from one span to the next, but in any one span these quantities are considered constant. Two numerical examples are included to illustrate the application of the method.

SIGN CONVENTION

The following sign convention is used. Clockwise rotations are taken as positive. Bending moments at the ends of a span are considered positive when acting in a clockwise direction on the beam.

## BASIS AND GENERAL DESCRIPTION OF METHOD

When a continuous beam is in a state of free oscillations, each of the spans is elastically restrained against rotation at its ends by the rigidity of the contiguous spans and vibrates with the same frequency as that of the continuous system. Therefore, the problem of determining the natural frequencies of a continuous beam is basically the same as that of determining the corresponding frequencies of one of its spans only, with proper consideration of the actual restraints existing at its ends. The stiffnesses of these restraints depend on the properties of all the spans and on the order of the desired natural frequency.

Consider a continuous beam oscillating in its fundamental mode of free vibration. Let the supports be numbered consecutively starting with 1 at one end and terminating with  $z$  at the other end. Let  $\theta_j$  be the rotation of the beam at an interior support  $j$ , and  $M_{j,j-1}$  and  $M_{j,j+1}$  be the internal bending moments at end  $j$  of the span between  $(j-1)$  and  $j$ , and that between  $j$  and  $(j+1)$ , respectively. The relationship between these quantities may be expressed by the equations

$$M_{j,j-1} = -K_{j,j-1}\theta_j \quad \text{and} \quad M_{j,j+1} = -K_{j,j+1}\theta_j, \quad (1)$$

in which  $K_{j,j-1}$  and  $K_{j,j+1}$  are the stiffnesses of the internal restraints at support  $j$ . For a hinged condition  $K = 0$ , whereas for a fixed condition  $K = \text{infinity}$ . The negative signs in the foregoing expressions denote that for a positive restraint (positive value of  $K$ ), the moment exerted by the restraint on the span acts in a direction opposite to the direction of rotation of the span. The end moments  $M_{1,2}$  and  $M_{z,z-1}$  are related to the end rotations  $\theta_1$  and  $\theta_z$  by expressions similar to

those given in Eq. (1). It will be assumed that the stiffnesses of the end restraints,  $K_{1,2}$  and  $K_{2,2-1}$ , are positive and known.

For a natural mode of free vibration, no external moment acts on the system; therefore,

$$M_{j,j-1} + M_{j,j+1} = 0 ; \quad (2)$$

whence

$$K_{j,j-1} + K_{j,j+1} = 0 . \quad (3)$$

Expressed in words, Eq. (3) states that the sum of the stiffnesses at a joint is equal to zero. It should be pointed out that this relationship holds true not only for the fundamental mode, but for the higher natural modes as well.

The procedure to be presented consists of: (a) isolating from the continuous beam the span from  $j$  to  $(j+1)$  subjected to positive end restraints: (b) determining the stiffnesses of these restraints,  $K_{j,j+1}$  and  $K_{j+1,j}$ ; and (c) evaluating the fundamental frequency of the continuous beam from the approximation<sup>1</sup>

$$f \approx \left[ 1 + \frac{1}{2} \frac{\beta_{j,j+1}}{5 + \beta_{j,j+1}} \right] \left[ 1 + \frac{1}{2} \frac{\beta_{j+1,j}}{5 + \beta_{j+1,j}} \right] \frac{\pi}{2L_j^2} \sqrt{\frac{E_j I_j}{m_j}} , \quad (4)$$

in which  $L_j$ ,  $E_j I_j$ , and  $m_j$  are, respectively, the length, the flexural rigidity of the cross section, and the mass per unit of length of the span between  $j$  and  $(j+1)$ , and  $\beta_{j,j+1}$  and  $\beta_{j+1,j}$  are dimensionless quantities related to the stiffnesses of the end restraints by the equations

- 
1. "A Simple Approximation for the Natural Frequencies of Partly Restrained Bars," by N. M. Newmark and A. S. Veletsos, *Journal of Applied Mechanics*, Vol. 19, 1952, p. 563.

$$\beta_{j,j+1} = K_{j,j+1} \frac{L_j}{E_j I_j} \quad \text{and} \quad \beta_{j+1,j} = K_{j+1,j} \frac{L_j}{E_j I_j} \quad (5)$$

The frequency  $f$  is expressed in cycles per second. Eq. (4) is applicable to positive restraints only; it is for this reason that the isolated span must be positively restrained.

### TWO-SPAN BEAMS

For a two-span beam, such as that shown in Fig. 1, it is only necessary to determine the stiffness of the restraint exerted by one span upon the other. Let  $f_1$  and  $f_2$  be the fundamental frequencies of spans (1,2) and (2,3), assuming that the beam is hinged at support 2 ( $\beta_{2,1} = \beta_{2,3} = 0$ ). These frequencies may readily be evaluated from Eq. (4).

If the supports are numbered so that  $f_2 \leq f_1$ , the stiffness  $K_{2,3}$  of the restraint exerted by the dynamically stiffer span (1,2) on the dynamically weaker span (2,3) will be greater than or equal to zero, and the fundamental frequency  $\bar{f}$  of the continuous beam will lie between  $f_2$  and  $f_1$ .

From the results of numerical calculations based on exact solutions, the following empirical approximation has been found for  $K_{2,3}$ ,

$$K_{2,3} \approx (K_{2,3})_s \left[ 1 - \left( \frac{f_2}{f_1} \right)^2 \right], \quad (6)$$

in which  $(K_{2,3})_s$  is the stiffness of the restraint provided by span (1,2) under static conditions. It can readily be shown<sup>2</sup> that

---

2. See for example "A Direct Method of Moment Distribution," by T. Y. Lin, Transactions A.S.C.E., Vol. 102, 1937, p. 565.

$$(K_{2,3})_s = 4 \frac{EI_1}{L_1} \left[ 1 - \frac{1}{4 + \beta_{1,2}} \right] \quad (7)$$

With  $K_{3,2}$  known and  $K_{2,3}$  determined from Eq. (6), span (2,3) may now be treated as a bar subjected to positive end restraints, and its fundamental frequency, which is also the desired frequency of the continuous beam, may be evaluated from Eq. (4). In this case  $j = 2$  and  $j+1 = z = 3$ .

The accuracy of Eq. (6) and that of the natural frequencies determined by the foregoing procedure have been checked for over three hundred representative beams having end restraints in the range between hinged and fixed conditions and spans with ratios of lengths, ratios of flexural rigidities of cross section, and ratios of masses per unit of length in the range between zero and one. The greatest error was found to occur in the case of beams which have a ratio of flexural rigidities of cross section from about 0.2 to 0.4 and have the extreme end of the dynamically stiffer span hinged or practically unrestrained and the end of the other span clamped or very nearly fixed.

As an indication of the accuracy of Eq. (6) some representative results, including those for which the error is maximum, are given in Fig. 2. In this figure, the abscissas  $K_{2,3} / (K_{2,3})_s$  were determined from the exact solution, whereas the quantities  $f_1$  and  $f_2$  for the ordinates were computed from Eq. (4). The vertical distances between the various points in this figure and the diagonal line represent the error involved in Eq. (6). These particular results are applicable to two-span beams simply supported at one end and elastically restrained at the other. It should be noted that for the limiting values of  $f_2/f_1 = 0$  and

$f_2/f_1 = 1.00$  Eq. (6) is exact.

Figure 2 indicates that, when the ratio of the flexural rigidities is the variable, the error in Eq. (6) is appreciable. However, because the natural frequencies of elastically restrained bars are not very sensitive to the stiffnesses of the end restraints, the error in the natural frequencies determined by using Eq. (6) is for all practical purposes insignificant. By comparing the exact natural frequencies of the more than three hundred beams referred to previously with those determined by the foregoing procedure, it was found that the maximum error in the frequencies determined by the approximate method is within  $\pm 5$  percent.

Example. - As an illustration, consider a beam having the following characteristics:

$$L_1 = 0.80L_2, \quad E I_1 = E I_2, \quad m_1 = 0.81m_2,$$

$$K_{1,2} = 1.0E I_1/L_1 \quad \text{and} \quad K_{3,2} = 5.0E I_2/L_2.$$

The frequencies  $f_2$  and  $f_1$ , determined from Eq. (4), are

$$f_2 = 1.00 \times 1.25 f_0 = 1.25 f_0,$$

$$f_1 = 1.083 \times 1.00 \times \frac{1}{0.576} f_0 = 1.88 f_0,$$

where

$$f_0 = \frac{\pi}{2L_2^2} \sqrt{E I_2/m_2}.$$

The static stiffness of the restraint exerted by span (1,2) on span (2,3) is

$$(K_{2,3})_s = 0.80 \times 4.0 E I_1/L_1 = 3.2 E I_1/L_1,$$

and the corresponding dynamic stiffness, computed from Eq. (6), is

$$K_{2,3} = 0.558 \times 3.2 \frac{E I_1}{L_1} = 1.79 \frac{E I_1}{L_1}.$$

Then,

$$\beta_{2,3} = 1.79 \times \frac{1}{0.80} = 2.24, \quad \beta_{3,2} = 5.0,$$

and

$$\bar{f} = 1.155 \times 1.25 f_0 = 1.44 f_0.$$

The exact value of  $\bar{f}$ , neglecting the effects of damping, rotatory inertia, and shearing deformation, is  $1.43 f_0$ .

### THREE-SPAN BEAMS

Consider the three-span beam shown in Fig. 3. Let  $f_1^0$ ,  $f_2^0$ , and  $f_3^0$  be, respectively, the fundamental frequencies of spans (1,2), (2,3), and (3,4), assuming that the beam is hinged over its interior supports ( $\beta_{2,1} = \beta_{2,3} = \beta_{3,2} = \beta_{3,4} = 0$ ). These frequencies are determined from Eq. (4). Only those cases will here be considered for which  $f_1^0$  and  $f_3^0$  are sufficiently larger than  $f_2^0$  so that, when the beam vibrates in its fundamental mode, the restraints exerted on the central span are positive.

The stiffnesses  $K_{2,3}$  and  $K_{3,2}$  are determined by successive approximations as follows: One assumes a value for, say,  $K_{3,2}$  and, by treating the portion of the beam between supports 1 and 3 as a two-span continuous beam in the manner described previously, calculates an approximate value for  $K_{2,3}$ . Using this value of  $K_{2,3}$  and working with the portion of the beam between supports 2 and 4, one then computes a new value for  $K_{3,2}$ . From this revised value of  $K_{3,2}$ , one then obtains



a new value of  $K_{2,3}$ . This procedure is repeated until the values of both  $K_{2,3}$  and  $K_{3,2}$  converge. Reasonable convergence is generally obtained in two or three cycles.

Having  $K_{2,3}$  and  $K_{3,2}$ , the fundamental frequency  $\bar{f}$  of the continuous beam may be calculated from Eq. (4) by considering the central span as an elastically restrained bar. As before, by comparing the exact and the approximate natural frequencies for a number of representative beams covering the possible range of variables, it has been concluded that the maximum error in the value of  $\bar{f}$  determined by the foregoing procedure is of the order of  $\pm 5$  percent.

Example. - As an illustration, consider a beam having the following characteristics.

$$E_1 I_1 = 0.80 E_2 I_2, \quad L_1 = 0.85 L_2, \quad m_1 = 0.80 m_2,$$

$$E_3 I_3 = 0.80 E_2 I_2, \quad L_3 = 0.90 L_2, \quad m_3 = 0.70 m_2,$$

$$K_{1,2} = 4.0 E_1 I_1 / L_1 \quad \text{and} \quad K_{4,3} = 1.6 E_3 I_3 / L_3.$$

$$\text{The frequency } f_2^0 = \frac{\pi}{2L_2^2} \sqrt{E_2 I_2 / m_2} = f_0.$$

The frequencies  $f_1^0$  and  $f_3^0$ , evaluated from Eq. (4), are

$$f_1^0 = 1.22 \times 1.00 \times 1.384 f_0 = 1.69 f_0,$$

$$f_3^0 = 1.00 \times 1.12 \times 1.320 f_0 = 1.48 f_0.$$

In this particular case, the successive approximation procedure is started by taking for the dynamic stiffness  $K_{3,2}$  a value equal to one-half the corresponding static stiffness ( $K_{3,2}$ )<sub>s</sub>. The value of the latter is determined from Eq. (7) by replacing the

quantities  $E I_{11}$  and  $L_1$  by  $E I_{33}$  and  $L_3$ , and  $\beta_{1,2}$  by  $\beta_{4,3}$ ,

$$(K_{3,2})_s = 0.8214 \times 4.0 \frac{E I_{33}}{L_3} = 3.286 \frac{E I_{33}}{L_3} = 2.92 \frac{E I_{22}}{L_2}.$$

Hence,

$$K_{13,2} = 0.5 \times 2.92 \frac{E I_{22}}{L_2} = 1.46 \frac{E I_{22}}{L_2}.$$

In this expression  $K_{13,2}$  denotes the first approximation to  $K_{3,2}$ . In general,  $K_{nj,j+1}$  will designate the value of  $K_{j,j+1}$  at the beginning of the n-th cycle of the procedure.

The portion of the beam between supports 1 and 3 is now treated as a two-span continuous beam with  $K_{3,2}$  equal to  $1.46 \frac{E I_{22}}{L_2}$ . The frequencies  $f_1$  and  $f_2$  of the individual spans (assuming the beam hinged at support 2) are

$$f_1 = f_1^0 = 1.69 f_0,$$

and

$$f_2 = 1.11 f_0.$$

The static stiffness of the restraint provided by span (1,2) on span (2,3) is determined from Eq. (7) as

$$(K_{2,3})_s = 0.875 \times 4.0 \frac{E I_{11}}{L_1} = 3.50 \frac{E I_{11}}{L_1} = 3.29 \frac{E I_{22}}{L_2}.$$

The first approximation to the corresponding dynamic stiffness is obtained from Eq. (6) as

$$K_{12,3} = 0.569 \times 3.29 \frac{E I_{22}}{L_2} = 1.87 \frac{E I_{22}}{L_2}.$$

Next, the portion of the beam between supports 2 and 4 is considered, with  $K_{2,3}$  taken equal to  $K_{12,3}$ . On the assumption that the beam is hinged at support 3, the fundamental frequencies of the individual

spans are

$$f_2 = 1.136 f_0 \quad \text{and} \quad f_3 = f_3^0 = 1.48 f_0.$$

The dynamic stiffness  $K_{3,2}$  is obtained from Eq. (6) by substituting  $(K_{3,2})_s$  for  $(K_{2,3})_s$  and  $f_3$  for  $f_1$ ,

$$K_{2,3,2} = 0.411 \times 2.92 \frac{E I}{L^2} = 1.20 \frac{E I}{L^2}.$$

This newly computed value of  $K_{3,2}$  leads to  $K_{2,2,3} = 1.91 \frac{E I}{L^2}$

which, in turn, leads to  $K_{3,3,2} = 1.19 \frac{E I}{L^2}$ . It should be observed that, for all practical purposes,  $K_{2,2,3}$  is equal to  $K_{1,2,3}$  and  $K_{3,3,2}$  is equal to  $K_{2,3,2}$ . Therefore, the  $\beta$  values for the central span may be taken as

$$\beta_{2,3} = 1.91 \quad \text{and} \quad \beta_{3,2} = 1.19.$$

The fundamental frequency  $\bar{f}$  of the continuous beam is finally evaluated from Eq. (4), where  $j = 2$ , as follows:

$$\bar{f} = 1.138 \times 1.096 f_0 = 1.25 f_0.$$

The exact value of  $\bar{f}$ , neglecting the effects of damping, rotatory inertia, and shearing distortion, is also equal to  $1.25 f_0$ .

#### ACKNOWLEDGMENT

The results presented herein were obtained in the course of a research program sponsored by the Mechanics Branch of the Office of Naval Research in the Structural Research Laboratory, Department of Civil Engineering, of the University of Illinois. The writers wish to thank Mrs. Nancy Brooks and Mr. W. Hemerling for performing the numerical work, and Dr. W. J. Austin for his helpful criticism as to the form of presentation.

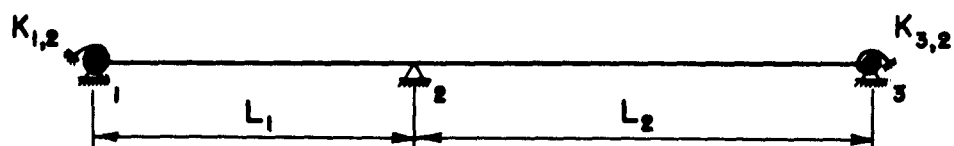


FIG. 1

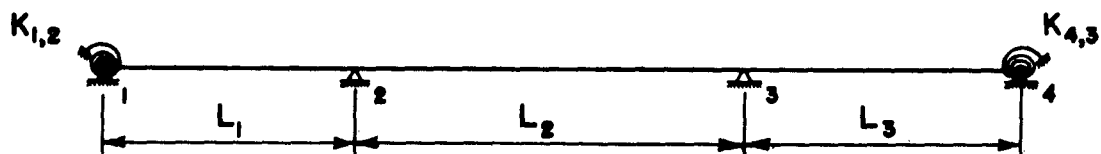


FIG. 3

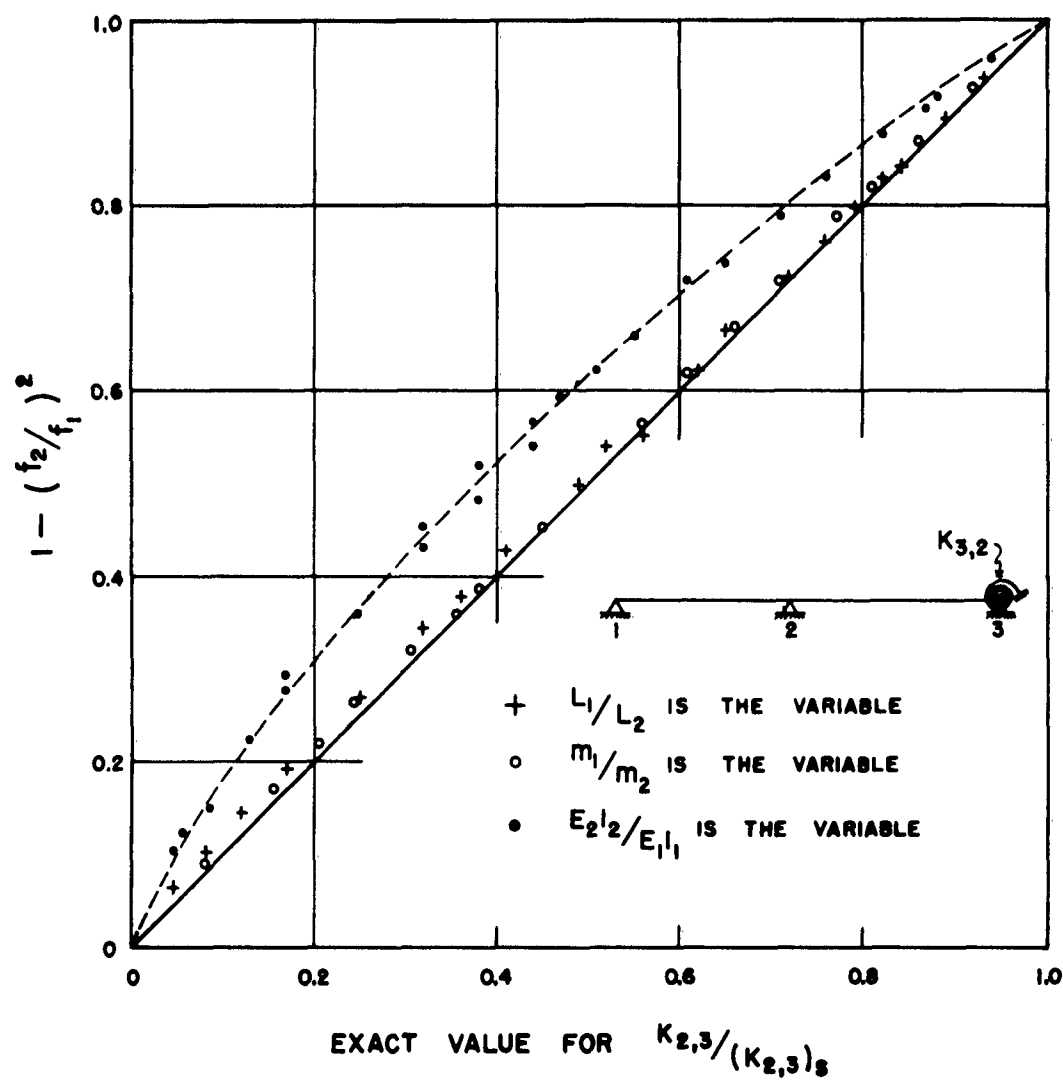


FIG. 2